

SSB Battery



Product	AGM battery
Version	Lead-fleece technology – grid plates, sealed
Condition	Filled and charged
Quality	Original equipment quality
Use	Short discharge times for high-current applications in the UPS sector as well as for applications with long autonomy time in the safety lighting
Shelf Life	Up to 12 months
Characteristics	Low self-discharge, absolutely maintenance-free
Application	Hazard alarm systems, fire alarm systems, alarm systems, burglar alarm systems, smoke extraction systems, heat extraction systems, video surveillance systems, access control systems, etc.

SB/SBLV (Life expectancy according to Eurobat 6–9 years/10–12 years)

Product	Volt (V)	Ah (C20)	Art. no.	Eurobat (years)	L x W x H in mm (H incl. terminal)	Weight (kg)	Terminal	VdS no.	PU (crt.)	PU (pal.)
SB1.2-12	12	1.2	158024	6-9	97 x 43 x 52 (58)	0.6	T1	G112062	20	1.800
SB2.3-12	12	2.3	100081	6-9	178 x 35 x 61 (67)	1.0	T1	G111033	10	800
SB5-12L	12	5.0	100030	6-9	90 x 70 x 101 (107)	1.4	T2		10	500
SB7-12	12	7.0	100016	6-9	151 x 65 x 94 (100)	2.2	T1	G111034	8	320
SB7-12L	12	7.0	100027	6-9	151 x 65 x 94 (100)	2.2	T2	G111034	8	320
SB12-12	12	12	100018	6-9	151 x 98 x 95 (101)	3.7	T1	G111035	4	200
SB12-12L	12	12	100032	6-9	151 x 98 x 95 (101)	3.7	T2	G111035	4	200
SBLV17-12i	12	17	140208	10-12	181 x 77 x 167 (167)	5.3	M5	G111036	2	120
SBLV24-12i	12	24	140209	10-12	166 x 175 x 125 (125)	7.6	M5	G111037	1	96
SBLV40-12i	12	42	140210	10-12	197 x 165 x 170 (170)	12.8	M6	G111038	1	60
SBLV65-12i	12	68	140211	10-12	350 x 167 x 179 (179)	20.4	M6	G111039	1	36



Please order by phone: +49 40 611 631-0, by email: bestellung@battery-kutter.de,
by fax: +49 40 611 631-79 or visit our online shop: www.battery-kutter.de



Product	AGM battery
Version	Lead-fleece technology – grid plates, sealed
Condition	Filled and charged
Quality	Original equipment quality
Use	Short discharge times for high-current applications in the UPS sector as well as for applications with long autonomy time in the safety lighting
Shelf Life	Up to 12 months
Characteristics	Low self-discharge, absolutely maintenance-free
Application	Emergency power systems, UPS systems, CPS systems, emergency lighting, safety lighting, voice alarm systems (VAS), electroacoustic public address systems (EPA), etc.

SBL (Life expectancy according to Eurobat 10–12 years)

Product	Volt (V)	Ah (C10/C20*)	Art. no.	Eurobat (years)	L x W x H in mm (H incl. terminal)	Weight (kg)	Terminal	PU (crt.)	PU (pal.)
SBL7.2-12L	12	7.2*	108026	10-12	151 x 65 x 94 (100)	2.2	T2	8	320
SBL9-12L	12	9*	108028	10-12	151 x 65 x 94 (100)	2.6	T2	8	320
SBL12-12L	12	12*	108039	10-12	151 x 98 x 95 (101)	3.7	T2	4	200
SBL18-12i	12	18*	108000	10-12	181 x 77 x 167 (167)	5.3	M5	2	120
SBL26-12i	12	26*	108001	10-12	166 x 175 x 125 (125)	8.1	M5	1	96
SBL28-12i	12	28	108091	10-12	165 x 125 x 175 (175)	8.5	M5	1	90
SBL33-12i	12	33	108002	10-12	195 x 130 x 155 (168)	9.7	M6	1	75
SBL40-12i	12	40	108003	10-12	197 x 165 x 170 (170)	13.8	M6	1	60
SBL55-12i	12	55	158004	10-12	229 x 138 x 208 (213)	18.0	M6	1	42
SBL65-12i	12	65	108005	10-12	350 x 167 x 179 (179)	20.4	M6	1	36
SBL75-12i(sh)	12	75	108006	10-12	258 x 166 x 210 (215)	24.0	M6	1	32
SBL80-12i	12	80	108012	10-12	350 x 167 x 179 (179)	22.5	M6	1	36
SBL100-12i	12	100	108007	10-12	330 x 171 x 215 (222)	29.0	M8	1	24
SBL120-12i(sh)	12	120	108015	10-12	330 x 171 x 215 (222)	32.5	M8	1	24
SBL134R-12i	12	134	108027	10-12	341 x 173 x 283 (288)	40.0	M8	1	20
SBL150-12i	12	150	108016	10-12	482 x 170 x 240 (240)	44.8	M8	1	18
SBL200-12i	12	200	108017	10-12	522 x 238 x 218 (223)	59.1	M8	1	12
SBL260-12i(sh)**	12	250	140032	10-12	520 x 269 x 221 (227)	74.0	M8	1	12
SBL260-12i**	12	260	140025	10-12	520 x 268 x 220 (225)	71.0	M8	1	12

** On request



Please order by phone: +49 40 611 631-0, by email: bestellung@battery-kutter.de, by fax: +49 40 611 631-79 or visit our online shop: www.battery-kutter.de



Product	AGM battery
Version	Lead-fleece technology – grid plates, sealed
Condition	Filled and charged
Quality	Original equipment quality
Use	Short discharge times for high-current applications in the UPS sector as well as for applications with long autonomy time in the safety lighting
Shelf Life	Up to 12 months
Characteristics	Low self-discharge, absolutely maintenance-free
Application	Emergency power systems, UPS systems, CPS systems, emergency lighting, safety lighting, etc.


SBH (Life expectancy according to Eurobat 6–9 years)

Product	Volt (V)	Watt 10 min.	Art. no.	Eurobat (years)	L x W x H in mm (H incl. terminal)	Weight (kg)	Terminal	PU (crt.)	PU (pal.)
SBH190-12	12	187.5	108029	6-9	90 x 70 x 101 (107)	1.6	T2	10	500
SBH200-12	12	170.5	108018	6-9	151 x 50 x 95 (101)	1.6	T2	10	400
SBH300-12	12	306.9	108008	6-9	151 x 65 x 94 (100)	2.5	T2	8	288

SBL-HR (Life expectancy according to Eurobat >12 years)

Product	Volt (V)	Watt 10 min.	Art. no.	Eurobat (years)	L x W x H in mm (H incl. terminal)	Weight (kg)	Terminal	PU (crt.)	PU (pal.)
SBL41-12HR	12	1022.4	108973	>12	195 x 130 x 155 (168)	10.2	M6	1	75
SBL50-12HR	12	1227.0	108972	>12	198 x 166 x 169 (169)	12.4	M6	1	60
SBL66-12HR	12	1636.2	108971	>12	229 x 138 x 211 (216)	16.5	M6	1	42
SBL85-12HR	12	2106.6	108970	>12	260 x 169 x 211 (218)	24.8	M6	1	32
SBL100-12HR	12	2725.8	108978	>12	306 x 168 x 210 (215)	29.0	M8	1	24
SBL125-12HR	12	3045.6	108969	>12	328 x 172 x 215 (220)	30.5	M8	1	24
SBL135-12HR	12	3607.2	108975	>12	407 x 177 x 225 (225)	36.5	M8	1	24
SBL151-12HR	12	3955.8	108974	>12	340 x 173 x 280 (287)	44.0	M8	1	24
SBL170-12HR	12	4336.2	108968	>12	483 x 170 x 241 (241)	46.0	M8	1	16
SBL240-12HR	12	5644.2	108094	>12	522 x 240 x 219 (224)	63.5	M8	1	12
SBL270-12HR**	12	7206.0	108979	>12	522 x 240 x 219 (224)	72.0	M8	1	12

Terminals

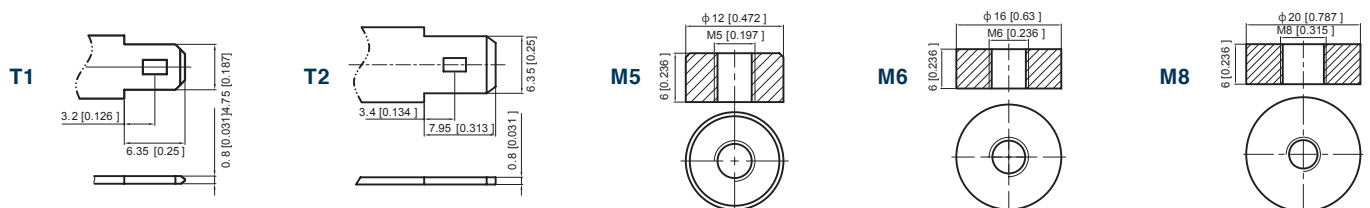

** On request



Please order by phone: +49 40 611 631-0, by email: bestellung@battery-kutter.de, by fax: +49 40 611 631-79 or visit our online shop: www.battery-kutter.de

SSB Grid Power Series




Product Version	AGM battery High temperature lead-acid batteries, sealed, absolutely maintenance-free, flame-retardant ABS-UL94-V0 casing
Condition Quality Use	Filled and charged Original equipment quality High ambient temperature, particularly high discharge over a short period of time
Shelf life	Up to 12 months
Characteristics	Absolutely maintenance-free, high-temperature lead-acid batteries; long life (EUROBAT classification: >12 years, Very Long Life); high savings potential in energy and maintenance costs
Application	Emergency power / UPS systems, emergency and safety lighting, switchgear, emergency power generator with diesel etc.
Design life Warranty	15 years at an ambient temperature of 35 °C 5 years



Grid Power Series									
Product	Volt (V)	1.8 V C10 (Ah)	Art. no.	L x W x H in mm (H incl. terminal)	Weight (kg)	Terminal	PU (crt.)	PU (pal.)	
Grid Power 200-2HT M8V0	2	200	2037723	170 x 110 x 328 (348)	13.5	M8	2	72	
Grid Power 300-2HT M8V0	2	300	2037724	170 x 150 x 328 (348)	18.8	M8	1	48	
Grid Power 500-2HT M8V0	2	500	2037725	240 x 175 x 330 (350)	30.0	M8	1	32	
Grid Power 800-2HT M8V0	2	800	2037727	410 x 175 x 330 (350)	50.4	M8	1	18	
Grid Power 1000-2HT M8V0	2	1000	2037728	475 x 175 x 328 (350)	60.0	M8	1	16	
Grid Power 1500-2HT M8V0	2	1500	2037729	403 x 354 x 339 (349)	97.8	M8	1	4	
Grid Power 2000-2HT M8V0	2	2000	2037731	490 x 350 x 339 (349)	121.0	M8	1	4	
Grid Power 3000-2HT M8V0	2	3000	2037732	709 x 350 x 337 (347)	183.0	M8	1	3	

Terminals



Please order by phone: +49 40 611 631-0, by email: bestellung@battery-kutter.de, by fax: +49 40 611 631-79 or visit our online shop: www.battery-kutter.de